

# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	25440S/060
Ø 6,5 mm	25440S/065
Ø 7,0 mm	25440S/070
Ø 7,5 mm	25440S/075
Ø 8,0 mm	25440S/080
Ø 8,5 mm	25440S/085
Ø 9,0 mm	25440S/090
Ø 9,5 mm	25440S/095
Ø 10,0 mm	25440S/100

**Bohrkopf spitz** Art. No  
*sharp head*


Ø 10,5 mm	25440S/105
Ø 11,0 mm	25440S/110
Ø 11,5 mm	25440S/115
Ø 12,0 mm	25440S/120
Ø 12,5 mm	25440S/125
Ø 13,0 mm	25440S/130
Ø 13,5 mm	25440S/135
Ø 14,0 mm	25440S/140
Ø 14,5 mm	25440S/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	25440S/150
Ø 15,5 mm	25440S/155
Ø 16,0 mm	25440S/160
Ø 16,5 mm	25440S/165
Ø 17,0 mm	25440S/170
Ø 17,5 mm	25440S/175
Ø 18,0 mm	25440S/180
Ø 18,5 mm	25440S/185
Ø 19,0 mm	25440S/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	25440S/195
Ø 20,0 mm	25440S/200
Ø 20,5 mm	25440S/205
Ø 21,0 mm	25440S/210
Ø 21,5 mm	25440S/215
Ø 22,0 mm	25440S/220

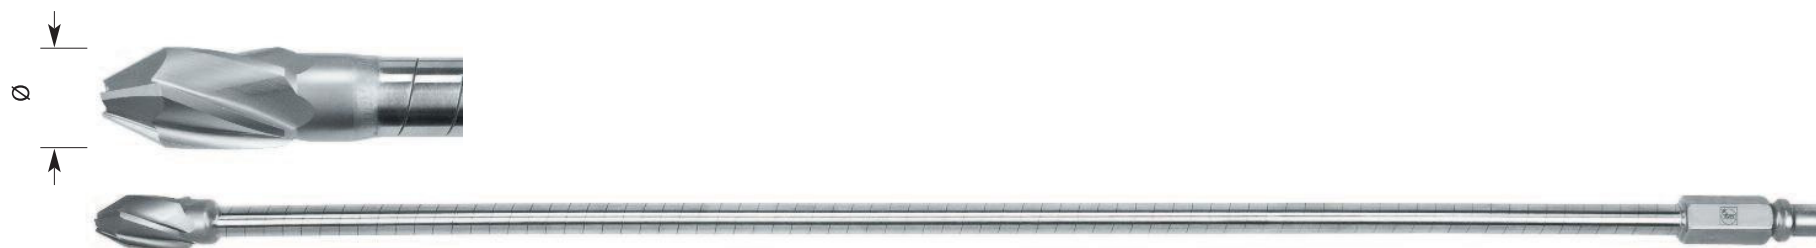

Gesamtlänge / total length 480 mm

**AO Anschluss**  
*AO coupling*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

AO

**Bohrkopf rund** Art. No  
*round head*

Ø 6,0 mm 25440R/060

Ø 6,5 mm 25440R/065

Ø 7,0 mm 25440R/070

Ø 7,5 mm 25440R/075

Ø 8,0 mm 25440R/080

Ø 8,5 mm 25440R/085

Ø 9,0 mm 25440R/090

Ø 9,5 mm 25440R/095

Ø 10,0 mm 25440R/100

**Bohrkopf rund** Art. No  
*round head*

Ø 10,5 mm 25440R/105

Ø 11,0 mm 25440R/110

Ø 11,5 mm 25440R/115

Ø 12,0 mm 25440R/120

Ø 12,5 mm 25440R/125

Ø 13,0 mm 25440R/130

Ø 13,5 mm 25440R/135

Ø 14,0 mm 25440R/140

Ø 14,5 mm 25440R/145

**Bohrkopf rund** Art. No  
*round head*

Ø 15,0 mm 25440R/150

Ø 15,5 mm 25440R/155

Ø 16,0 mm 25440R/160

Ø 16,5 mm 25440R/165

Ø 17,0 mm 25440R/170

Ø 17,5 mm 25440R/175

Ø 18,0 mm 25440R/180

Ø 18,5 mm 25440R/185

Ø 19,0 mm 25440R/190

**Bohrkopf rund** Art. No  
*round head*

Ø 19,5 mm 25440R/195

Ø 20,0 mm 25440R/200

Ø 20,5 mm 25440R/205

Ø 21,0 mm 25440R/210

Ø 21,5 mm 25440R/215

Ø 22,0 mm 25440R/220



Gesamtlänge / total length 480 mm

**AO Anschluss**  
*AO coupling*

Weitere Längen auf Anfrage / Other length upon request

# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	29400MS/060
Ø 6,5 mm	29400MS/065
Ø 7,0 mm	29400MS/070
Ø 7,5 mm	29400MS/075
Ø 8,0 mm	29400MS/080
Ø 8,5 mm	29400MS/085
Ø 9,0 mm	29400MS/090
Ø 9,5 mm	29400MS/095
Ø 10,0 mm	29400MS/100

**Bohrkopf spitz** Art. No  
*sharp head*


Ø 10,5 mm	29400MS/105
Ø 11,0 mm	29400MS/110
Ø 11,5 mm	29400MS/115
Ø 12,0 mm	29400MS/120
Ø 12,5 mm	29400MS/125
Ø 13,0 mm	29400MS/130
Ø 13,5 mm	29400MS/135
Ø 14,0 mm	29400MS/140
Ø 14,5 mm	29400MS/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	29400MS/150
Ø 15,5 mm	29400MS/155
Ø 16,0 mm	29400MS/160
Ø 16,5 mm	29400MS/165
Ø 17,0 mm	29400MS/170
Ø 17,5 mm	29400MS/175
Ø 18,0 mm	29400MS/180
Ø 18,5 mm	29400MS/185
Ø 19,0 mm	29400MS/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	29400MS/195
Ø 20,0 mm	29400MS/200
Ø 21,0 mm	29400MS/210
Ø 21,5 mm	29400MS/215
Ø 22,0 mm	29400MS/220

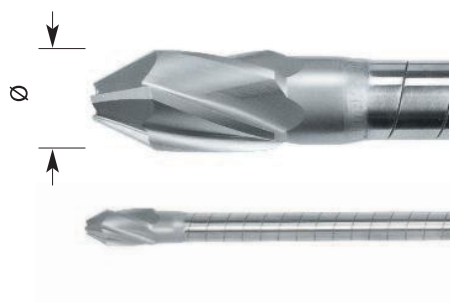

**mit Spannschraube**  
*with coupling nut*



Gesamtlänge / total length 480 mm

**Anschluss DIN 58809**  
*coupling DIN 58809*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

DIN 58809

Markraumborner / Flexible Reamers

**Bohrkopf rund** Art. No  
*round head*

Ø 6,0 mm	29400MR/060
Ø 6,5 mm	29400MR/065
Ø 7,0 mm	29400MR/070
Ø 7,5 mm	29400MR/075
Ø 8,0 mm	29400MR/080
Ø 8,5 mm	29400MR/085
Ø 9,0 mm	29400MR/090
Ø 9,5 mm	29400MR/095
Ø 10,0 mm	29400MR/100

**Bohrkopf rund** Art. No  
*round head*

Ø 10,5 mm	29400MR/105
Ø 11,0 mm	29400MR/110
Ø 11,5 mm	29400MR/115
Ø 12,0 mm	29400MR/120
Ø 12,5 mm	29400MR/125
Ø 13,0 mm	29400MR/130
Ø 13,5 mm	29400MR/135
Ø 14,0 mm	29400MR/140
Ø 14,5 mm	29400MR/145

**Bohrkopf rund** Art. No  
*round head*

Ø 15,0 mm	29400MR/150
Ø 15,5 mm	29400MR/155
Ø 16,0 mm	29400MR/160
Ø 16,5 mm	29400MR/165
Ø 17,0 mm	29400MR/170
Ø 17,5 mm	29400MR/175
Ø 18,0 mm	29400MR/180
Ø 18,5 mm	29400MR/185
Ø 19,0 mm	29400MR/190

**Bohrkopf rund** Art. No  
*round head*

Ø 19,5 mm	29400MR/195
Ø 20,0 mm	29400MR/200
Ø 20,5 mm	29400MR/205
Ø 21,0 mm	29400MR/210
Ø 21,5 mm	29400MR/215
Ø 22,0 mm	29400MR/220



Gesamtlänge / total length 480 mm

**mit Spanschraube**  
*with coupling nut*

**Anschluss DIN 58809**  
*coupling DIN 58809*

Weitere Längen auf Anfrage / Other length upon request

# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	29400S/060
Ø 6,5 mm	29400S/065
Ø 7,0 mm	29400S/070
Ø 7,5 mm	29400S/075
Ø 8,0 mm	29400S/080
Ø 8,5 mm	29400S/085
Ø 9,0 mm	29400S/090
Ø 9,5 mm	29400S/095
Ø 10,0 mm	29400S/100

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 10,5 mm	29400S/105
Ø 11,0 mm	29400S/110
Ø 11,5 mm	29400S/115
Ø 12,0 mm	29400S/120
Ø 12,5 mm	29400S/125
Ø 13,0 mm	29400S/130
Ø 13,5 mm	29400S/135
Ø 14,0 mm	29400S/140
Ø 14,5 mm	29400S/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	29400S/150
Ø 15,5 mm	29400S/155
Ø 16,0 mm	29400S/160
Ø 16,5 mm	29400S/165
Ø 17,0 mm	29400S/170
Ø 17,5 mm	29400S/175
Ø 18,0 mm	29400S/180
Ø 18,5 mm	29400S/185
Ø 19,0 mm	29400S/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	29400S/195
Ø 20,0 mm	29400S/200
Ø 20,5 mm	29400S/205
Ø 21,5 mm	29400S/215
Ø 22,0 mm	29400S/220



Gesamtlänge / total length 480 mm

**ohne Spannschraube**  
*without coupling nut*

**Anschluss DIN 58809**  
*coupling DIN 58809*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

DIN 58809

Markraumbohrer / Flexible Reamers

**Bohrkopf rund** Art. No  
*round head*

Ø 6,0 mm 29400R/060

Ø 6,5 mm 29400R/065

Ø 7,0 mm 29400R/070

Ø 7,5 mm 29400R/075

Ø 8,0 mm 29400R/080

Ø 8,5 mm 29400R/085

Ø 9,0 mm 29400R/090

Ø 9,5 mm 29400R/095

Ø 10,0 mm 29400R/100

**Bohrkopf rund** Art. No  
*round head*

Ø 10,5 mm 29400R/105

Ø 11,0 mm 29400R/110

Ø 11,5 mm 29400R/115

Ø 12,0 mm 29400R/120

Ø 12,5 mm 29400R/125

Ø 13,0 mm 29400R/130

Ø 13,5 mm 29400R/135

Ø 14,0 mm 29400R/140

Ø 14,5 mm 29400R/145

**Bohrkopf rund** Art. No  
*round head*

Ø 15,0 mm 29400R/150

Ø 15,5 mm 29400R/155

Ø 16,0 mm 29400R/160

Ø 16,5 mm 29400R/165

Ø 17,0 mm 29400R/170

Ø 17,5 mm 29400R/175

Ø 18,0 mm 29400R/180

Ø 18,5 mm 29400R/185

Ø 19,0 mm 29400R/190

**Bohrkopf rund** Art. No  
*round head*

Ø 19,5 mm 29400R/195

Ø 20,0 mm 29400R/200

Ø 20,5 mm 29400R/205

Ø 21,0 mm 29400R/210

Ø 21,5 mm 29400R/215

Ø 22,0 mm 29400R/220



ohne Spannschraube  
*without coupling nut*

Gesamtlänge / total length 480 mm

**Anschluss DIN 58809**  
*coupling DIN 58809*

Weitere Längen auf Anfrage / Other length upon request

# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	26440S/060
Ø 6,5 mm	26440S/065
Ø 7,0 mm	26440S/070
Ø 7,5 mm	26440S/075
Ø 8,0 mm	26440S/080
Ø 8,5 mm	26440S/085
Ø 9,0 mm	26440S/090
Ø 9,5 mm	26440S/095
Ø 10,0 mm	26440S/100

**Bohrkopf spitz** Art. No  
*sharp head*


Ø 10,5 mm	26440S/105
Ø 11,0 mm	26440S/110
Ø 11,5 mm	26440S/115
Ø 12,0 mm	26440S/120
Ø 12,5 mm	26440S/125
Ø 13,0 mm	26440S/130
Ø 13,5 mm	26440S/135
Ø 14,0 mm	26440S/140
Ø 14,5 mm	26440S/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	26440S/150
Ø 15,5 mm	26440S/155
Ø 16,0 mm	26440S/160
Ø 16,5 mm	26440S/165
Ø 17,0 mm	26440S/170
Ø 17,5 mm	26440S/175
Ø 18,0 mm	26440S/180
Ø 18,5 mm	26440S/185
Ø 19,0 mm	26440S/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	26440S/195
Ø 20,0 mm	26440S/200
Ø 20,5 mm	26440S/205
Ø 21,0 mm	26440S/210
Ø 21,5 mm	26440S/215
Ø 22,0 mm	26440S/220

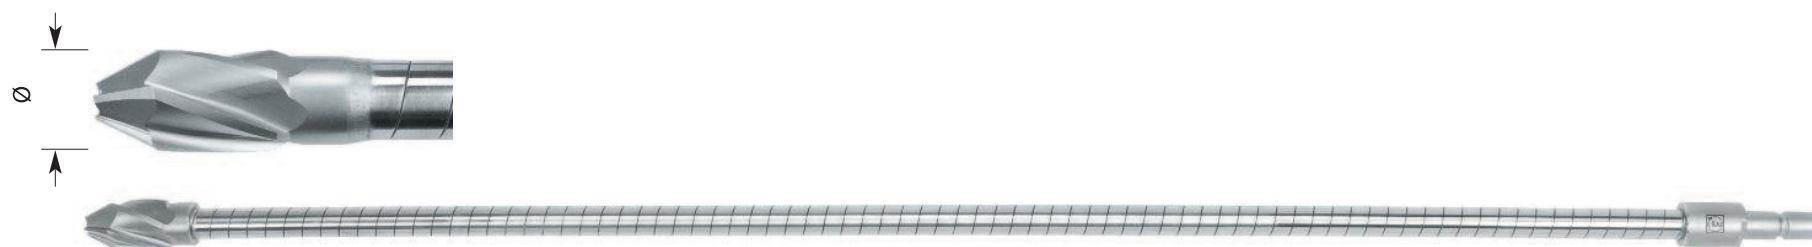

Gesamtlänge / total length 480 mm

**Anschluss HARRIS**  
*coupling HARRIS*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

HARRIS

Markraumböhrer / Flexible Reamers

**Bohrkopf rund** Art. No  
*round head*

Ø 6,0 mm	26440R/060
Ø 6,5 mm	26440R/065
Ø 7,0 mm	26440R/070
Ø 7,5 mm	26440R/075
Ø 8,0 mm	26440R/080
Ø 8,5 mm	26440R/085
Ø 9,0 mm	26440R/090
Ø 9,5 mm	26440R/095
Ø 10,0 mm	26440R/100

**Bohrkopf rund** Art. No  
*round head*

Ø 10,5 mm	26440R/105
Ø 11,0 mm	26440R/110
Ø 11,5 mm	26440R/115
Ø 12,0 mm	26440R/120
Ø 12,5 mm	26440R/125
Ø 13,0 mm	26440R/130
Ø 13,5 mm	26440R/135
Ø 14,0 mm	26440R/140
Ø 14,5 mm	26440R/145

**Bohrkopf rund** Art. No  
*round head*

Ø 15,0 mm	26440R/150
Ø 15,5 mm	26440R/155
Ø 16,0 mm	26440R/160
Ø 16,5 mm	26440R/165
Ø 17,0 mm	26440R/170
Ø 17,5 mm	26440R/175
Ø 18,0 mm	26440R/180
Ø 18,5 mm	26440R/185
Ø 19,0 mm	26440R/190

**Bohrkopf rund** Art. No  
*round head*

Ø 19,5 mm	26440R/195
Ø 20,0 mm	26440R/200
Ø 20,5 mm	26440R/205
Ø 21,0 mm	26440R/210
Ø 21,5 mm	26440R/215
Ø 22,0 mm	26440R/220



Gesamtlänge / total length 480 mm

**Anschluss HARRIS**  
*coupling HARRIS*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	27440S/060
Ø 6,5 mm	27440S/065
Ø 7,0 mm	27440S/070
Ø 7,5 mm	27440S/075
Ø 8,0 mm	27440S/080
Ø 8,5 mm	27440S/085
Ø 9,0 mm	27440S/090
Ø 9,5 mm	27440S/095
Ø 10,0 mm	27440S/100

**Bohrkopf spitz** Art. No  
*sharp head*


Ø 10,5 mm	27440S/105
Ø 11,0 mm	27440S/110
Ø 11,5 mm	27440S/115
Ø 12,0 mm	27440S/120
Ø 12,5 mm	27440S/125
Ø 13,0 mm	27440S/130
Ø 13,5 mm	27440S/135
Ø 14,0 mm	27440S/140
Ø 14,5 mm	27440S/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	27440S/150
Ø 15,5 mm	27440S/155
Ø 16,0 mm	27440S/160
Ø 16,5 mm	27440S/165
Ø 17,0 mm	27440S/170
Ø 17,5 mm	27440S/175
Ø 18,0 mm	27440S/180
Ø 18,5 mm	27440S/185
Ø 19,0 mm	27440S/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	27440S/195
Ø 20,0 mm	27440S/200
Ø 20,5 mm	27440S/205
Ø 21,0 mm	27440S/210
Ø 21,5 mm	27440S/215
Ø 22,0 mm	27440S/220

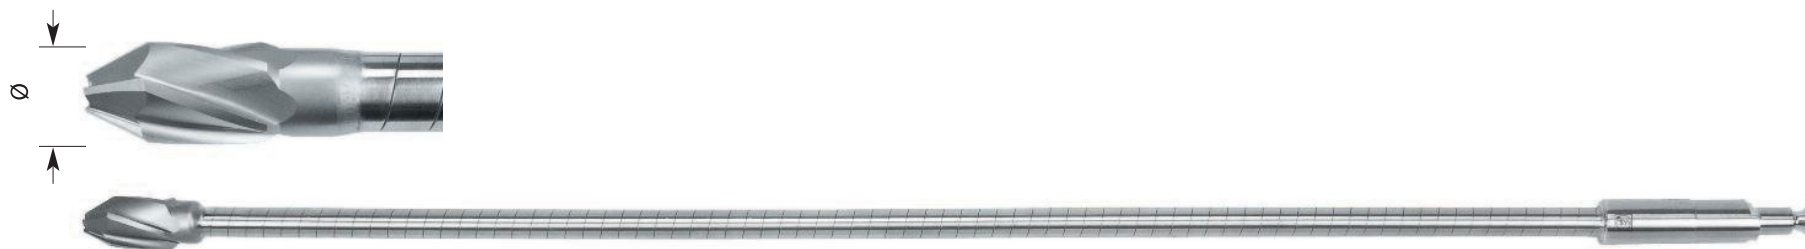

Gesamtlänge / total length 480 mm

**Anschluss HUDSON**  
*coupling HUDSON*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

HUDSON

Bohrkopf rund Art. No  
*round head*

Ø 6,0 mm 27440R/060

Ø 6,5 mm 27440R/065

Ø 7,0 mm 27440R/070

Ø 7,5 mm 27440R/075

Ø 8,0 mm 27440R/080

Ø 8,5 mm 27440R/085

Ø 9,0 mm 27440R/090

Ø 9,5 mm 27440R/095

Ø 10,0 mm 27440R/100

Bohrkopf rund Art. No  
*round head*

Ø 10,5 mm 27440R/105

Ø 11,0 mm 27440R/110

Ø 11,5 mm 27440R/115

Ø 12,0 mm 27440R/120

Ø 12,5 mm 27440R/125

Ø 13,0 mm 27440R/130

Ø 13,5 mm 27440R/135

Ø 14,0 mm 27440R/140

Ø 14,5 mm 27440R/145

Bohrkopf rund Art. No  
*round head*

Ø 15,0 mm 27440R/150

Ø 15,5 mm 27440R/155

Ø 16,0 mm 27440R/160

Ø 16,5 mm 27440R/165

Ø 17,0 mm 27440R/170

Ø 17,5 mm 27440R/175

Ø 18,0 mm 27440R/180

Ø 18,5 mm 27440R/185

Ø 19,0 mm 27440R/190

Bohrkopf rund Art. No  
*round head*

Ø 19,5 mm 27440R/195

Ø 20,0 mm 27440R/200

Ø 20,5 mm 27440R/205

Ø 21,0 mm 27440R/210

Ø 21,5 mm 27440R/215

Ø 22,0 mm 27440R/220



Gesamtlänge / *total length* 480 mm

Anschluss HUDSON  
*coupling HUDSON*

Weitere Längen auf Anfrage / *Other length upon request*

# Flexible Reamers



**Bohrkopf spitz** Art. No  
*sharp head*

Ø 6,0 mm	28440S/060
Ø 6,5 mm	28440S/065
Ø 7,0 mm	28440S/070
Ø 7,5 mm	28440S/075
Ø 8,0 mm	28440S/080
Ø 8,5 mm	28440S/085
Ø 9,0 mm	28440S/090
Ø 9,5 mm	28440S/095
Ø 10,0 mm	28440S/100

**Bohrkopf spitz** Art. No  
*sharp head*


Ø 10,5 mm	28440S/105
Ø 11,0 mm	28440S/110
Ø 11,5 mm	28440S/115
Ø 12,0 mm	28440S/120
Ø 12,5 mm	28440S/125
Ø 13,0 mm	28440S/130
Ø 13,5 mm	28440S/135
Ø 14,0 mm	28440S/140
Ø 14,5 mm	28440S/145

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 15,0 mm	28440S/150
Ø 15,5 mm	28440S/155
Ø 16,0 mm	28440S/160
Ø 16,5 mm	28440S/165
Ø 17,0 mm	28440S/170
Ø 17,5 mm	28440S/175
Ø 18,0 mm	28440S/180
Ø 18,5 mm	28440S/185
Ø 19,0 mm	28440S/190

**Bohrkopf spitz** Art. No  
*sharp head*

Ø 19,5 mm	28440S/195
Ø 20,0 mm	28440S/200
Ø 20,5 mm	28440S/205
Ø 21,0 mm	28440S/210
Ø 21,5 mm	28440S/215
Ø 22,0 mm	28440S/220

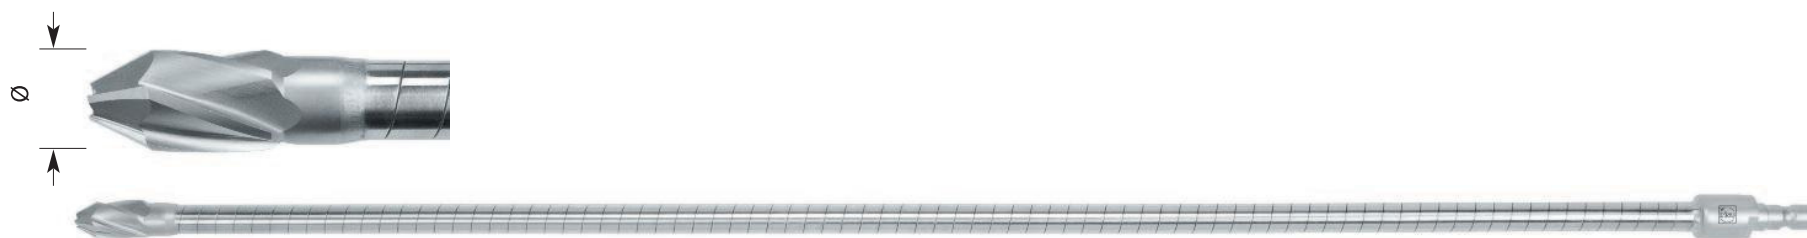

Gesamtlänge / total length 480 mm

**Anschluss STRYKER / ZIMMER**  
*coupling STRYKER / ZIMMER*

Weitere Längen auf Anfrage / Other length upon request



# Flexible Reamers

STRYKER / ZIMMER

Markraumbohrer / Flexible Reamers

Bohrkopf rund Art. No  
*round head*

Ø 6,0 mm 28440R/060

Ø 6,5 mm 28440R/065

Ø 7,0 mm 28440R/070

Ø 7,5 mm 28440R/075

Ø 8,0 mm 28440R/080

Ø 8,5 mm 28440R/085

Ø 9,0 mm 28440R/090

Ø 9,5 mm 28440R/095

Ø 10,0 mm 28440R/100

Bohrkopf rund Art. No  
*round head*

Ø 10,5 mm 28440R/105

Ø 11,0 mm 28440R/110

Ø 11,5 mm 28440R/115

Ø 12,0 mm 28440R/120

Ø 12,5 mm 28440R/125

Ø 13,0 mm 28440R/130

Ø 13,5 mm 28440R/135

Ø 14,0 mm 28440R/140

Ø 14,5 mm 28440R/145

Bohrkopf rund Art. No  
*round head*

Ø 15,0 mm 28440R/150

Ø 15,5 mm 28440R/155

Ø 16,0 mm 28440R/160

Ø 16,5 mm 28440R/165

Ø 17,0 mm 28440R/170

Ø 17,5 mm 28440R/175

Ø 18,0 mm 28440R/180

Ø 18,5 mm 28440R/185

Ø 19,0 mm 28440R/190

Bohrkopf rund Art. No  
*round head*

Ø 19,5 mm 28440R/195

Ø 20,0 mm 28440R/200

Ø 20,5 mm 28440R/205

Ø 21,0 mm 28440R/210

Ø 21,5 mm 28440R/215

Ø 22,0 mm 28440R/220



Gesamtlänge / total length 480 mm

Anschluss STRYKER / ZIMMER  
*coupling STRYKER / ZIMMER*

Weitere Längen auf Anfrage / *Other length upon request*